Magic plus 3.9

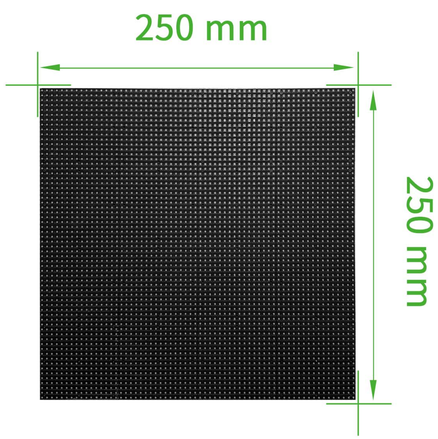



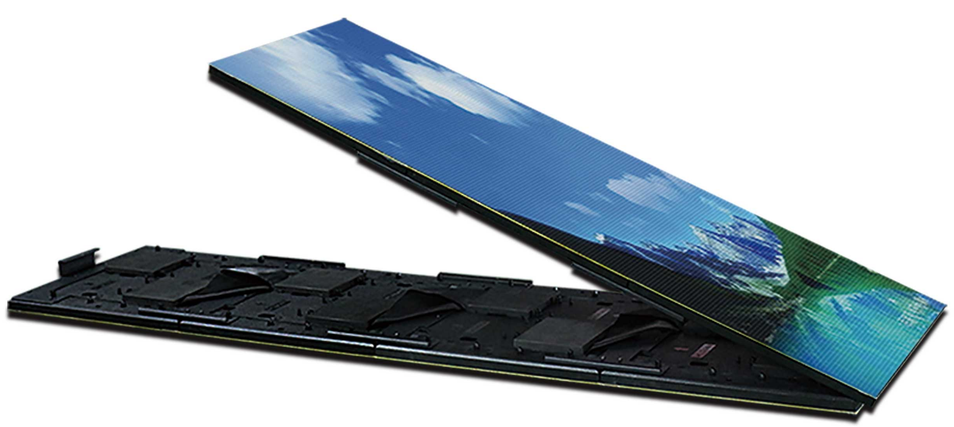

Magic plus FPS 180° foldable		
Application Environment		Outdoor
Model		Magic plus 3
Pixel Pitch	(mm)	3.9
IP Rating		IP65
LED Type		SMD 1921
Pixel Density	(pixel/㎡)	65536
Driving Mode		1/16
Gray Scale	(bit)	16
Max Brightness (cooper wire led)	(nits)	7000
Max Brightness (golden wire led)	(nits)	8500
Max Power Consumption (cooper wire led)	(w/㎡)	880
Max Power Consumption (golden wire led)	(w/㎡)	900
Max Refresh Rate	(Hz)	4000
Module Resolution	(pixels)	64 * 64
Module Size	(mm)	250 * 250
Screen Thickness	(mm)	15
Weight	(kg/㎡)	12.5
Folding Angle		180°
Viewing Angle	(H/V)	120° / 120°
Output Voltage	(V)	DC24V/48V
Input Voltage	(V)	AC100 ~ AC240
Maximum load height of single control box	(m)	6
Best Viewing Distance	(m)	≥4
Brightness adjustment (digital)	(levels)	256
Brightness adjustment (analog current)	(levels)	64-256
Contrast		2500:1
Connection Type	(standard) (spare)	2+14pin Soldering 50pin Connector
Short Circuit Protection		Yes
Quick Maintenance		Yes
Controlling Mode		synchronous asynchronous
Installation Method		Hanging Magnet mounting
Operation temperature	(C°)	-40 ~ 65
Operation humidity	(RH)	0% ~ 90%
Certificate		

维世 ONUMEN